


HT386540 GUTTERMELT® ROOF CLIPS KIT




GutterMelt® Roof Clips are used to secure the heating cable to the roof.

WARNING: ELECTRIC SHOCK HAZARD. Disconnect all electrical power before installing or servicing GutterMelt® cable and/or accessories. A qualified person must perform all installation and service of GutterMelt® and its accessories per GutterMelt® installation instructions, the Canadian electric Code (CEC), the National Electric Code (NEC) and local building codes and requirements. All GutterMelt® installations must be effectively grounded in accordance with the CEC or NEC to eliminate shock hazards and risk to property. Failure to comply the installation instructions in their entirety can result in personal injury and/or property damage.

NOTE: All electrical wiring, including GFCI (Ground Fault Circuit Interrupters), must be done according to the CEC or NEC and/or local codes by qualified persons.

NOTICE: Caution must be used to make certain that all Power, End and Splice Kits are installed properly and water tight. All Self-Regulating Cables are adversely affected by water and will fail if water is allowed to enter its interior.



GutterMelt® Roof Clip Installation:

1. Plan the layout of the GutterMelt® Roof Clips according to the installation instructions supplied with the GutterMelt® cable. One double clip is used to secure the heating cable looped at the roof edge (this assures a drainage channel to the gutter, see figure 3). A single clip is used to fasten the cable at each top or apex of the layout, see figure 5. Single clips are made by breaking each double clip in half at the scored indentation. See Figure 1.

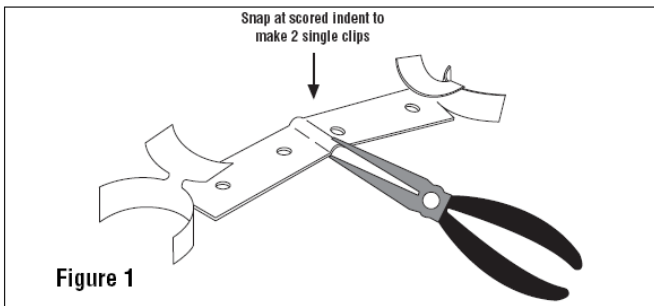


Figure 1

2. Attach the GutterMelt® Roof Clips to the roof with roofing nails or screws prior to installing the GutterMelt® Cable, see figure 2. Apply water sealing material around each nail/screw to prevent water leakage.

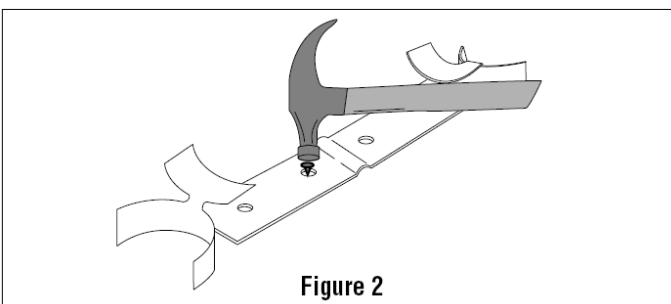


Figure 2

Warning: Failure to attach the GutterMelt® Roof Clips to the roof before installing the GutterMelt® cable may result in damage to the GutterMelt® Cable, risk of personal injury and/or property damage.

GutterMelt®
Heatizon Systems • (801) 293-1232

3. After installing the GutterMelt® Roof Clips on the roof, run the GutterMelt® heating cable around the GutterMelt® Roof Clips. Use extra GutterMelt® Roof Clips in any location where the GutterMelt® heating cable is susceptible to excess stress or movement.

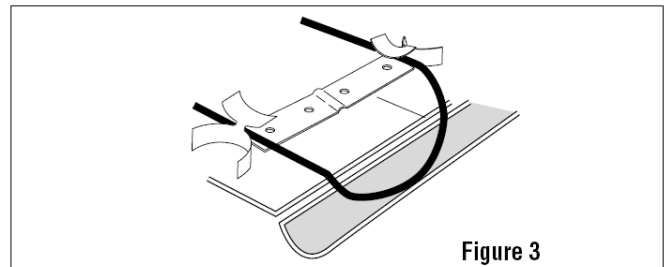


Figure 3

4. Using pliers, gently crimp the GutterMelt® Roof Clips firmly about the GutterMelt® Cable, being careful not to crush or otherwise change it. See figures 3 & 4

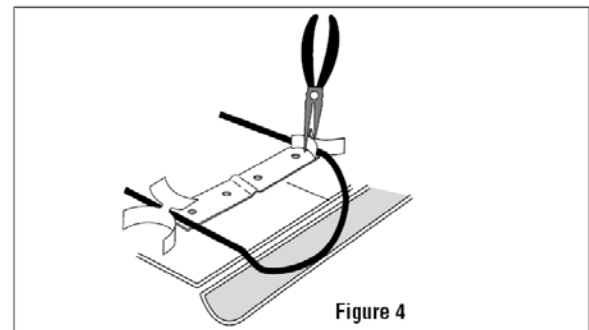


Figure 4

Single clip Installation

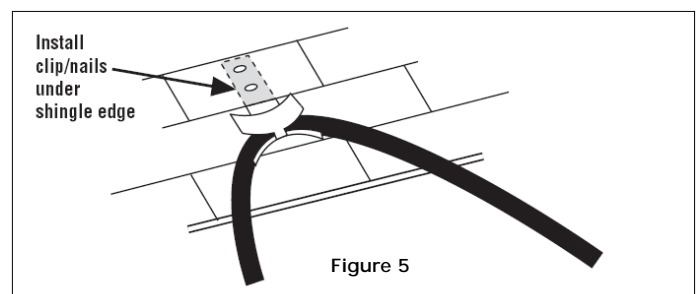


Figure 5

Note: Use Aluminum adhesive to hold GutterMelt® Cable in gutters. Use GutterMelt® Downspout Hangar Kit for downspouts.