


ROUGH-IN KIT

Description

Heatizon Systems Rough-In Kit contains the following:

- 12" h X 17" w Control box and transformer mounting Back Plate (P1320)
- 50' Thermostat wire (M316)
- 50' to 200' Cold lead (E210)
- Installation Manual
- 4 Conductor Connectors
- 1 Plastic Conductor Bushing
- 4 Mounting Screws

Each Rough-In Kit contains enough cold lead to extend twice the total vertical and horizontal distance between the control box location and the area where the heating element will be installed.





Thermostat Wire (M316)

Uses

Heatizon Rough-In Kit is used for mounting: 1– CBX6, CBX6T, CBX6F, CBX6TF, CBX23, CBX23T, CBX23F, or CBX23TF Control Boxes (Note: SLC 500 Control Box does not require a Rough-In Kit); and

1- S050, S101, S102, S103, S104, S105, S106, S202, or S203 Transformer



Heatizon Systems 4403 South 500 West Murray, UT 84123 www.heatizon.com




Phone (801) 293-1232 Fax (801) 293-3077 Toll Free (888) 239-1232

Available Sizes

Rough-in Kits are sized according to the total length of the Cold Lead. Rough-in Kits offered by Heatizon Systems include:

- Rough-In Kit 50
- Rough-In Kit 100
- Rough-In Kit 150
- Rough-In Kit 200

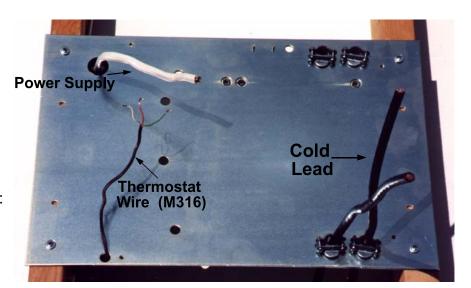

Note: Additional Cold Lead (Heatizon Part Number E210) is available from Heatizon Systems.

Requirements

- One Control Box: CBX6, CBX6T, CBX6F, CBX6TF, CBX23, CBX23T, CBX23F, or CBX23TF.
- One Element Kit:
 - —Tuff Cable Element Kit: CABKIT100, CABKIT200, CABKIT300, CABKIT400, CABKIT500, CABKIT600, CABKIT700, or CABKIT800.
 - —Z Mesh Element Kit, 12": SCRKIT50, SCRKIT75, SCRKIT100, SCRKIT150, SCRKIT200, SCRKIT250, SCRKIT300, or SCRKIT350.
 - —Z Mesh Element Kit, 9": SCRKIT50-9, SCRKIT100-9, or SCRKIT250-9.
- One Transformer:
 - —\$050-1/2kVA, \$101-1kVA, \$102-2kVA, \$103-3kVA, \$104-4kVA, \$105-5kVA, \$106-6kVA, \$202-2X2kVA, or \$203-2X3kVA.
- One of the many activation devices offered by Heatizon Systems and designed to satisfy your specific needs.

Heatizon Systems 4403 South 500 West Murray, UT 84123 www.heatizon.com



Phone (801) 293-1232 Fax (801) 293-3077 Toll Free (888) 239-1232