

M326A-2Z Aerial Snow Switch

DATA SHEET

Features:

- Activates System when moisture is detected and temperature is below set point
- 34° - 44° F : Field Selectable
- Automatic Activation means Lower De-icing Costs
- Reliable Rain and Snow Detection
- Replaceable Precipitation Sensor
- Easy Installation, Full Access to Electronics
- Adjustable Temperature Trigger
- Adjustable Delay Off Cycle, Selectable 30-90 Minutes
- Selectable Low Temperature Cutoff
- Smart "Manual On" Operates for One Delay Off Cycle
- Bright Power/Activation LED Indicator

Design:




Applications:

- For Use with SLC500, CBX Series, Radiant 8, M329, M346, M330 Series, M530 Series
- Direct Load Switching up to 2 x 30A/240VAC
- Snow Melting
- Roof Deicing
- Gutter Deicing/Melting

Specifications:

- Requires 100-240 VAC
- Full 2 x 30A @ 240 VAC Control
- Dimensions: 4¾"(120) x 7"(178) x 2¾"(70)
- Weight: 2 pounds
- Front cover electronics access

Wiring:

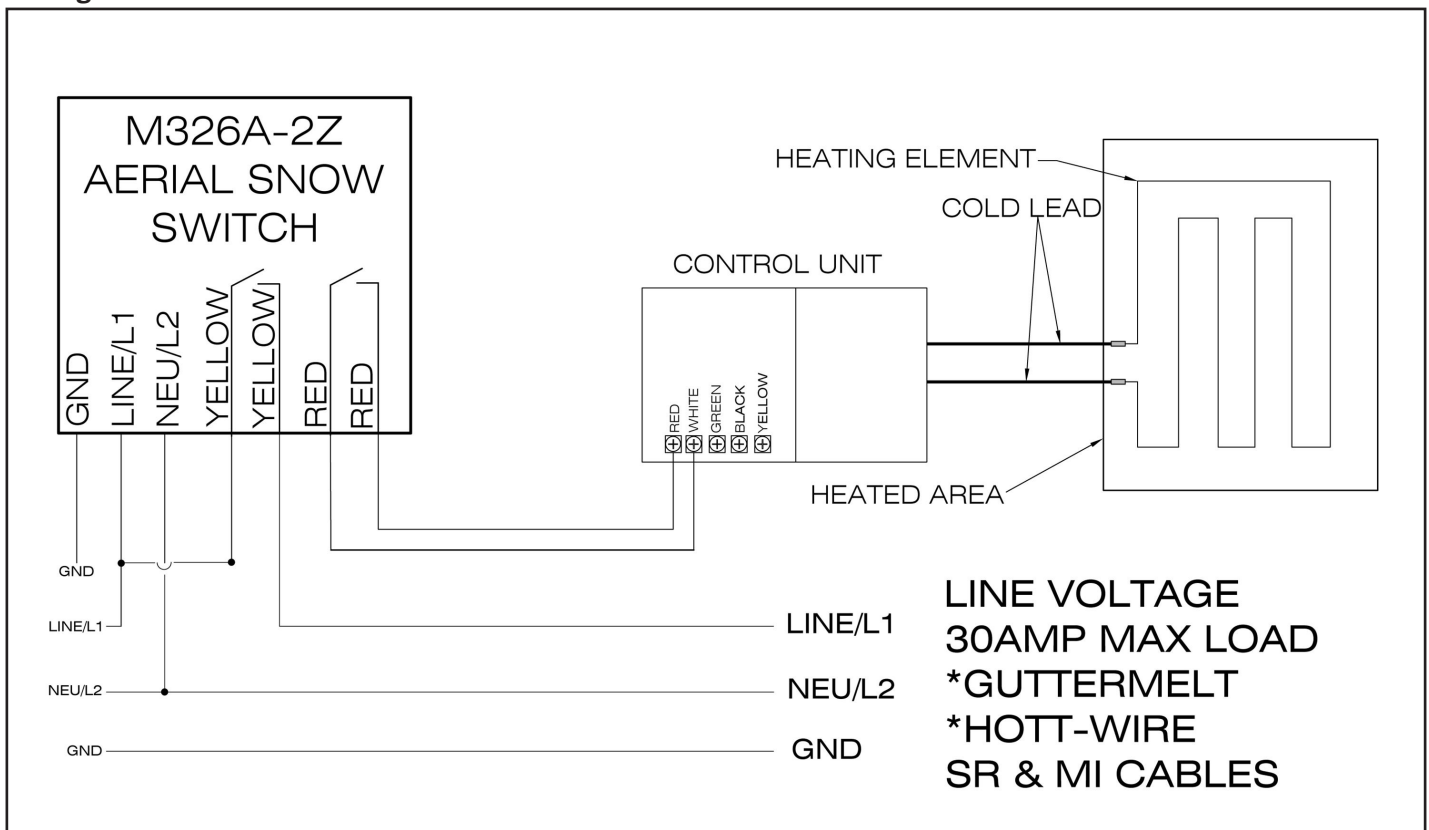

Note: Refer to the NEC or CEC for specific requirements.



4137 South 500 West
Murray, Utah 84123

FOR MORE INFORMATION
Company: Heatizon Systems
Toll Free: 888-239-1232
Email: info@heatizon.com
Visit us at: www.heatizon.com