DATA SHEET

Features:

- Activates System when moisture is detected and temperature is below set point
- 34° 44° F: Field Selectable
- · Automatic Activation means Lower De-icing Costs
- · Reliable Rain and Snow Detection
- Replaceable Remote Precipitation Sensor
- Easy Installation, Full Access to Electronics
- Adjustable Temperature Trigger
- Adjustable Delay Off Cycle, Selectable 30-90 Minutes or 2-6 Hours
- Adjustable Precipitation Sensitivity
- Selectable Low Temperature Cutoff
- Smart "Manual On" Operates for One Delay Off Cycle
- · Bright Power/Activation LED Indicator

Applications:

- For Use with SLC500, CBX Series, Radiant 8, M329, M346, M330 Series, M530 Series
- Direct Load Switch up to 30A/277V
- Snow Melting
- Roof Deicing
- Gutter De-icing/Melting


Design:



Specifications:

- Requires 100-277 VAC 50/60hz
- Full 30A @ 277VAC Control
- Dimensions: 4³/₄"(120) x 7"(178) x 2³/₄"(70)
- · Weight: 2 pounds
- Front cover electronics access

Wiring:

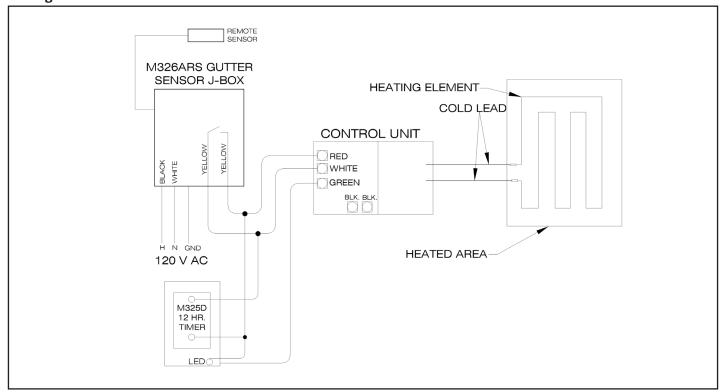




Note: Refer to the NEC or CEC for specific requirements.




4137 South 500 West Murray, Utah 84123 FOR MORE INFORMATION

DATA SHEET



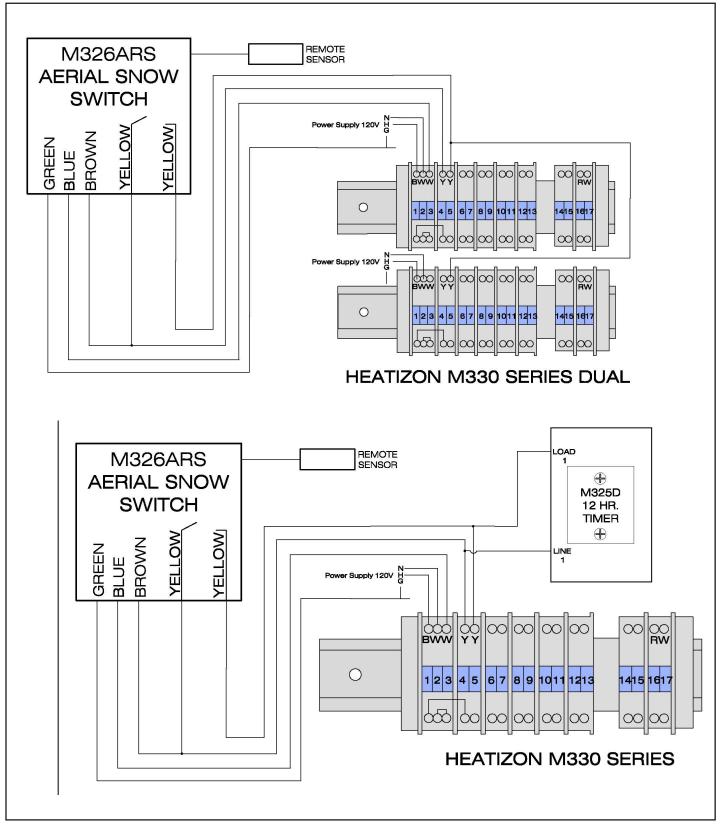







4137 South 500 West Murray, Utah 84123

FOR MORE INFORMATION

DATA SHEET



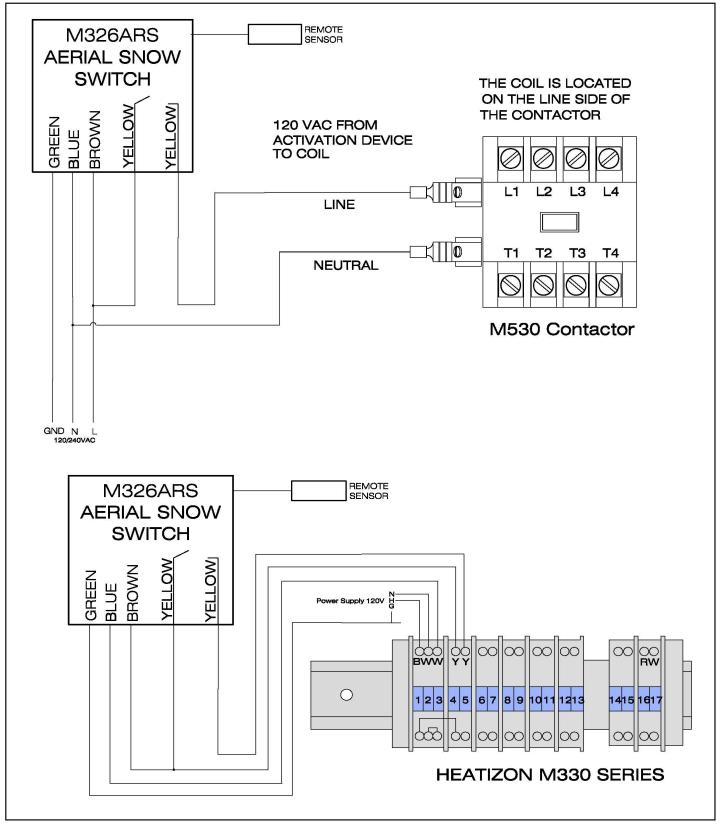






4137 South 500 West Murray, Utah 84123

FOR MORE INFORMATION


DATA SHEET

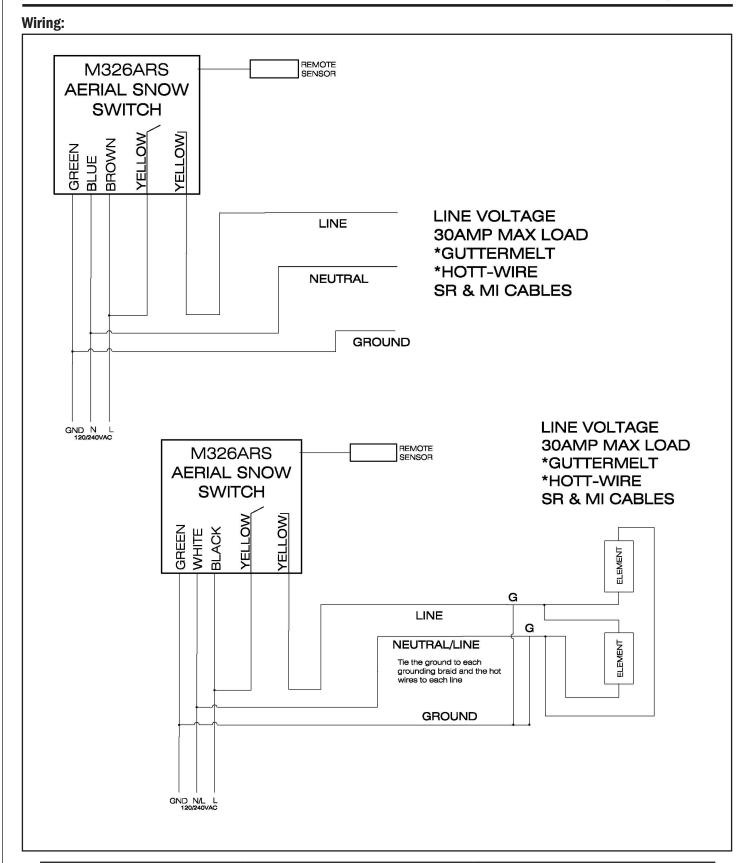






DATA SHEET

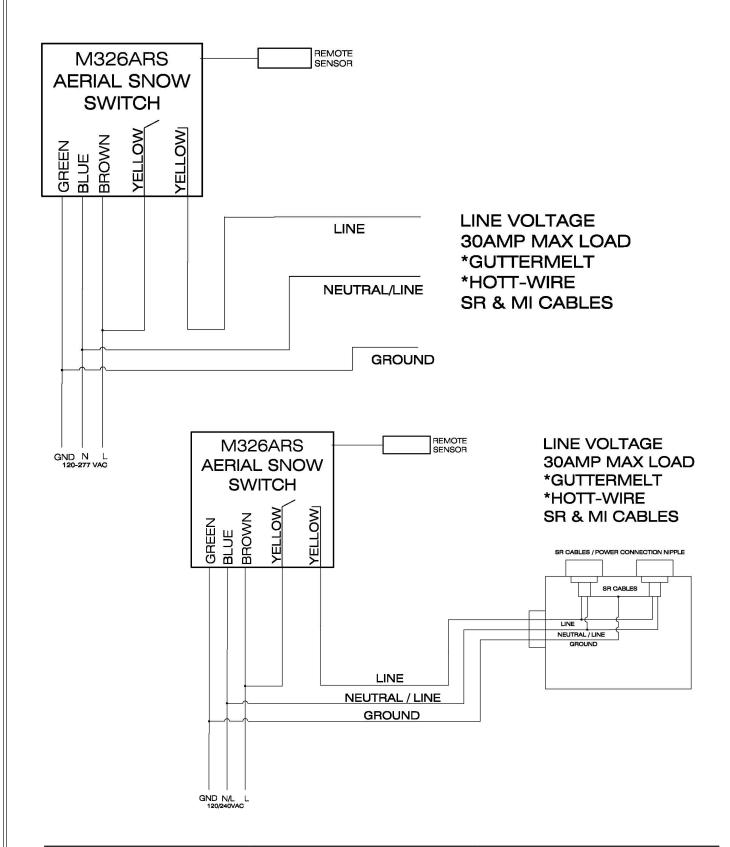





4137 South 500 West Murray, Utah 84123 FOR MORE INFORMATION