

M326ARS24 Ice & Snow Sensor Controller

DATA SHEET

Features:

- Activates System when moisture is detected and temperature is below 34° - 44° F : Field Selectable
- Powered by CBXT Models, M329, or M360
- Designed for Low Voltage Hydronic and Battery Powered Systems
- Automatic Activation means Lower Deicing Costs
- Reliable Rain and Snow Detection
- Replaceable Precipitation Sensor
- Easy Installation, Full Access to Electronics
- 8 Different Functions, 1 Part Number
- Adjustable Temperature Trigger Point
- Adjustable Delay Off Cycle, Selectable 30-90 Mins or 2-6 Hrs
- Exclusive Adjustable Sensitivity Control
- Selectable Low Temperature Cutoff
- Smart “Manual On” Operates for One Delay Off Cycle
- LED indicator light

Design:




Specifications:

- 24VAC/VDC Operation, Only 20 VA Required
- Full 30A @ 24VAC Control
- Dimensions: 4¾”(120) x 7”(178) x 2¾”(70)
- Weight: 2 pounds

Applications:

- For Use with SLC500, CBXT Series, Radiant 8, M329, M346
- Snow Melting
- Roof Deicing
- Gutter Melting

Wiring:

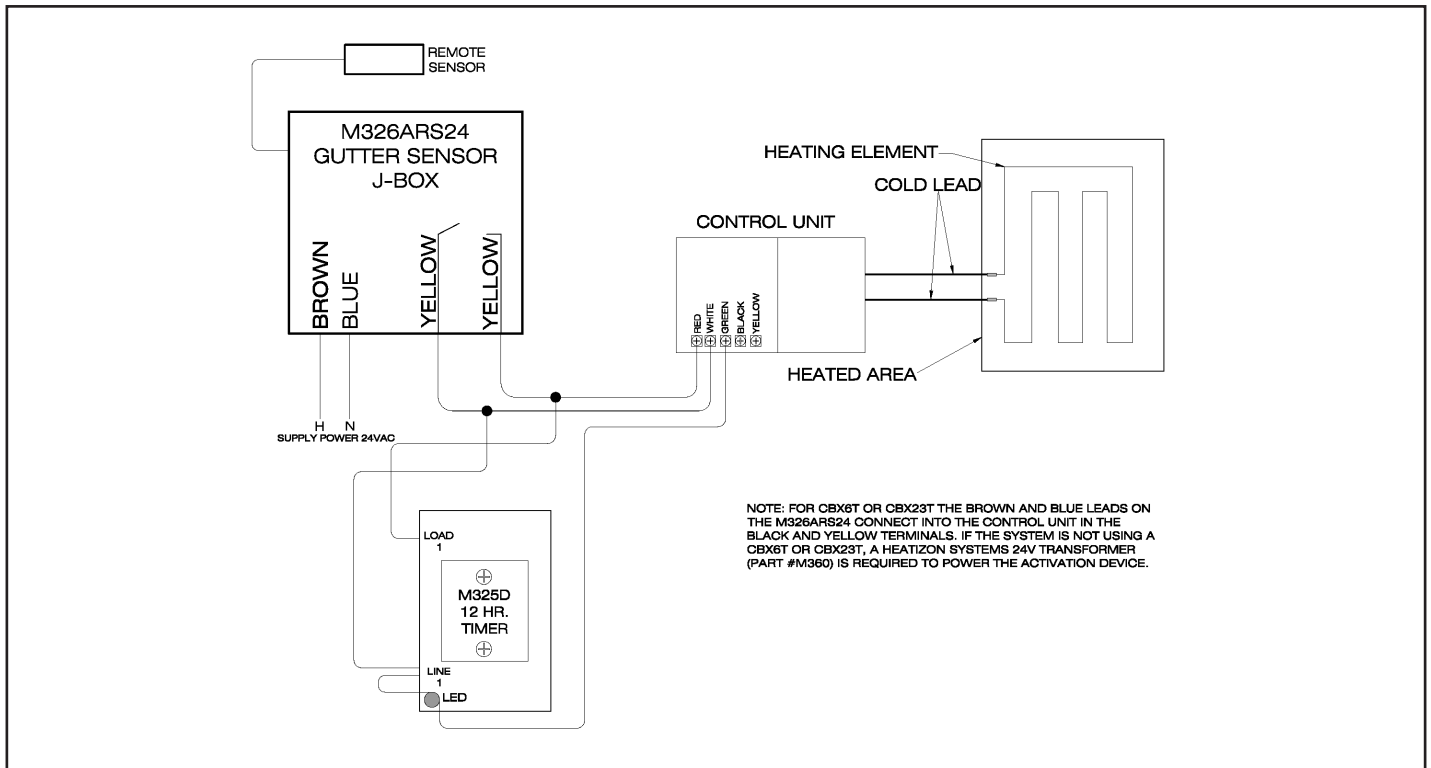

Note: Refer to the NEC or CEC for specific requirements.




4137 South 500 West
Murray, Utah 84123

FOR MORE INFORMATION
Company: Heatizon Systems
Toll Free: 888-239-1232
Email: info@heatizon.com
Visit us at: www.heatizon.com

M326ARS24 Ice & Snow Sensor Controller

DATA SHEET

Wiring:

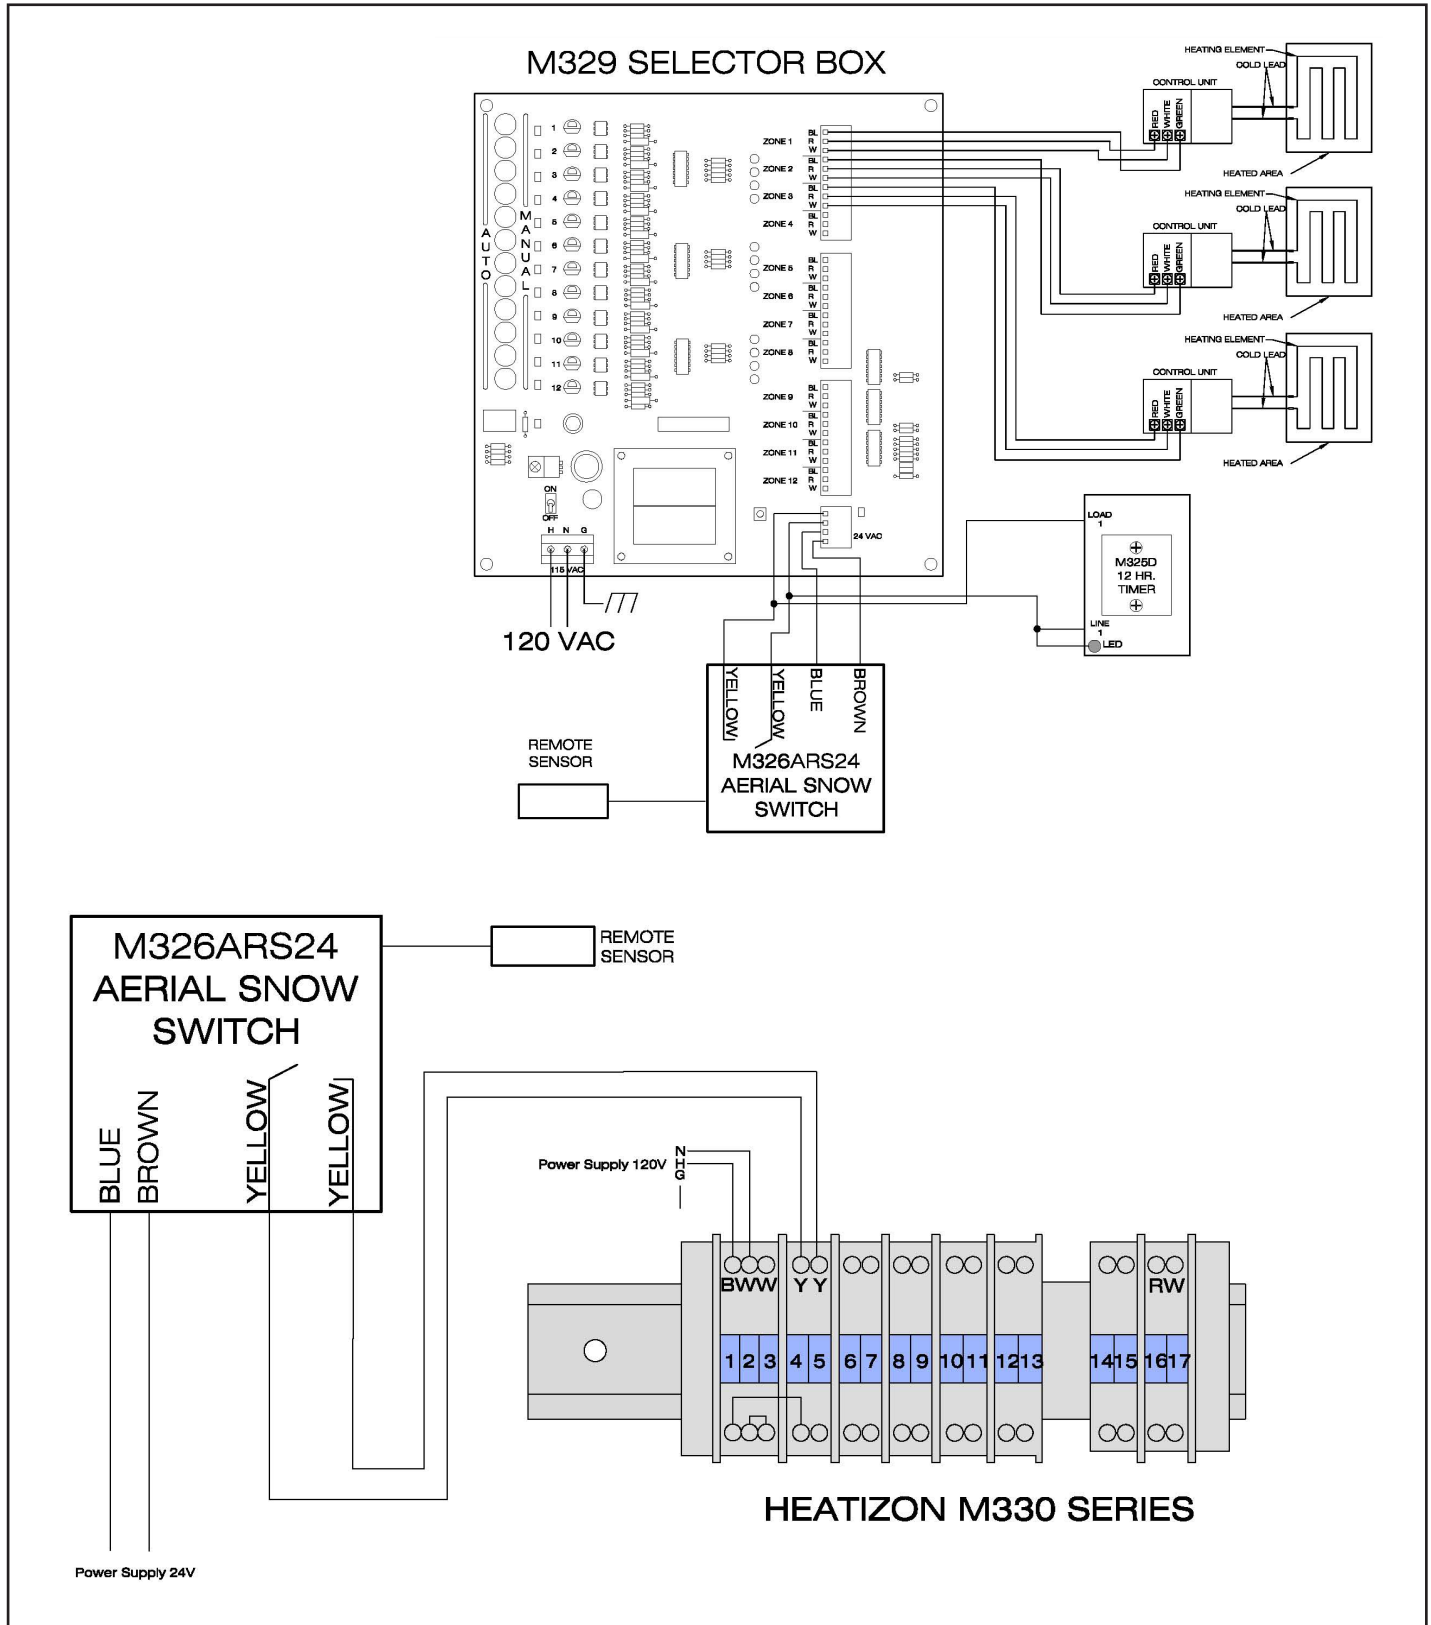

Note: Refer to the NEC or CEC for specific requirements.



4137 South 500 West
Murray, Utah 84123

FOR MORE INFORMATION
Company: Heatizon Systems
Toll Free: 888-239-1232
Email: info@heatizon.com
Visit us at: www.heatizon.com